


# Frameless Roof Lantern

## Product Information

- Thermally broken aluminium comprising of 2 x 32mm polyamide inserts
- 23mm overhang for a better weather tight seal
- Glass spec is 4 / 22 / 4mm
- Solar Control Toughened glass
- Supplied fully bonded
- Structural glass to glass joins both internally & externally
- Lantern pitch 40 degrees
- No external fixings
- Maximum size 1500 x 3000mm

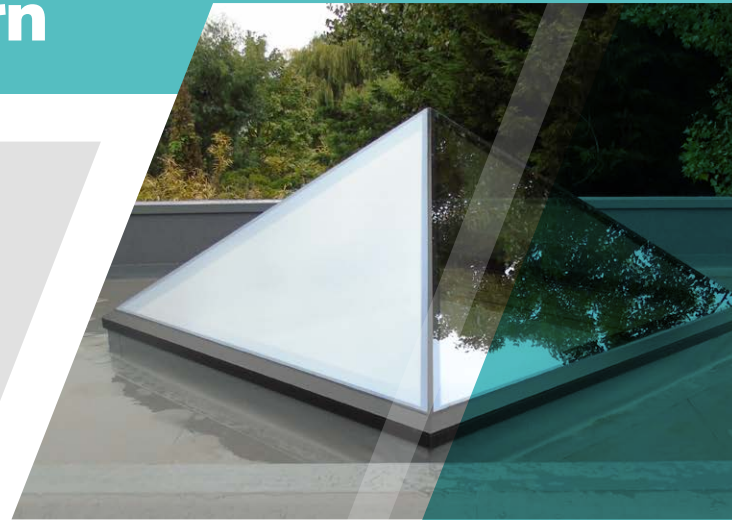

## Installation

To ensure a better weathertightness, there are no external fixings on our Frameless Roof Lanterns & Pyramids

All our Lantern/Pyramids come fully bonded ready to simply fix onto the timber upstand.

Roof Lanterns should be installed on a flat roof with no pitch

The full fitting guide can be downloaded from our website.

## Colours

Standard Colours:

**Anthracite Grey** RAL 7016m

**Jet Black** RAL 9005m

**Dual colour** (white internal) also available for an additional charge.

**Bespoke RAL** colour also available for an additional charge.

## Warranty

Our Rooflights are guaranteed for 5 year parts only in accordance to our terms and conditions.

Both warranty certificate and our terms & conditions are available to download from our website.